GENERAL MAGLOCK WIRING

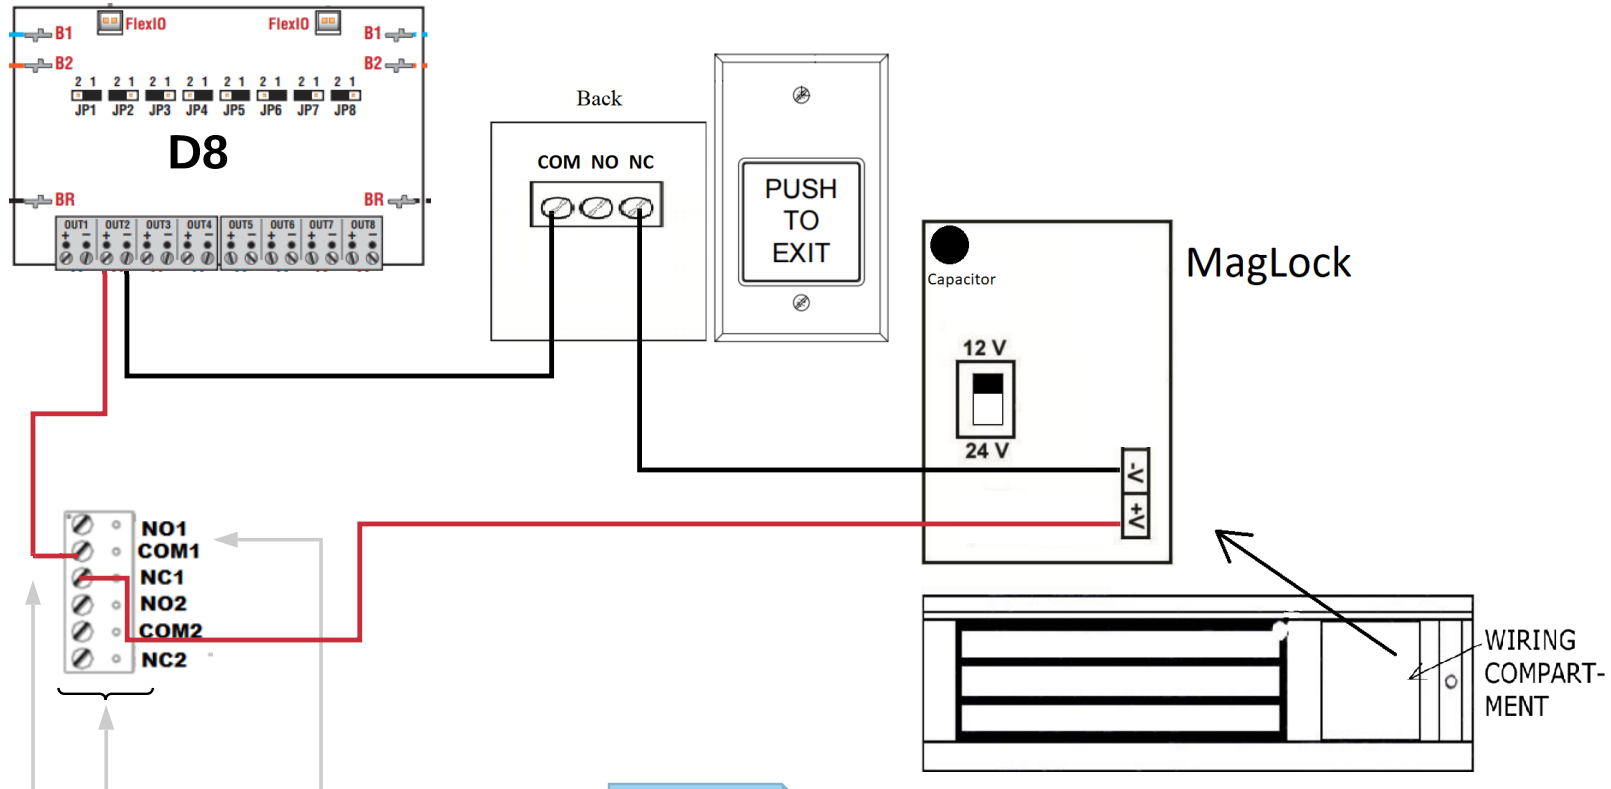

MagLock 1 goes to Reader 1 , and so-on

MagLock Input Locations

- 1501: TB5
- 1502: TB10, TB11
- MR52: TB10,TB11,TB12

(TB = Terminal Block)

Power Lead:
(cut length of wire for power lead)

Positive D8 output connects directly to Common (aka Com1)

WARNING: when using a maglock, it is required to place a pushbutton in series with the maglock power, in order to interrupt the lock in an emergency.